


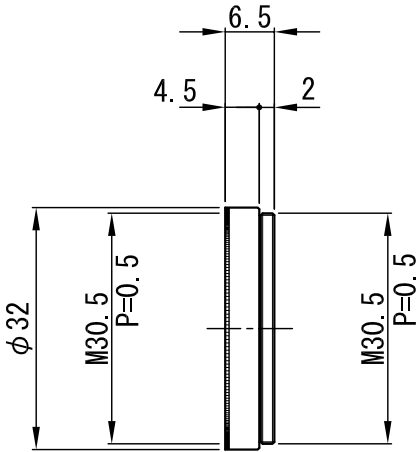

※下記機種は外観寸法共通
SV-UV330-305、SV-IR305、SV-R64-305、SV-B440-305、SV-VC700-305、SV-VC800-305

△×				APPROVED	CHECKED	MATERIAL 材料				—		CHAMFER 一般面取		—		QUANTITY 個数						
△×				S. U.	S. U.	TREATMENT 処理				—		FINISHING 仕上		—		—						
△×						TREATMENT CONTACT 処理接点				—		DECENTRATION 偏芯		—								
△×				DESIGNED	DRAWN	OVER 250 UP TO 1000	±0.3	±0.5	±1.0	±0.2	UNIT (mm)	ANGLE 角度	METHOD 図法	REMARK 適用（機種名）								
△×						OVER 63 UP TO 250	±0.2	±0.3	±0.6	±0.15		—		SV-□□□-305 (UV_IR_R64_B_VCseries)								
△×						OVER 16 UP TO 63	±0.1	±0.2	±0.4	±0.1	SCALE	1 / 1		NAME	外 観 図							
△×						OVER 0 UP TO 16	±0.05	±0.1	±0.2	±0.1				DRAW NO.	0 D F L 0 0 9 4 A 1							
NO.×箇所	REVISION 訂正事項		DATE	NAME	S. U.	M. M.	TOLERANCES				A	B	C	S	DATE	' 17.07.04		DRAW NO.	0 D F L 0 0 9 4 A 1			