

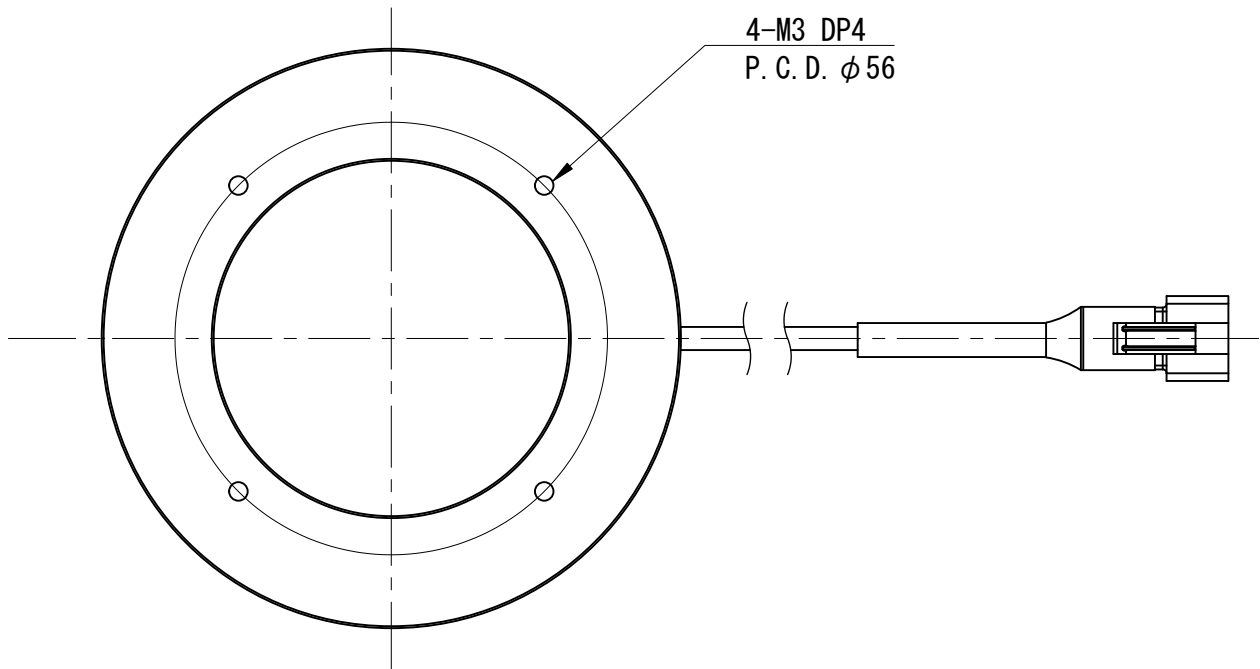


Confidential

Cable tag

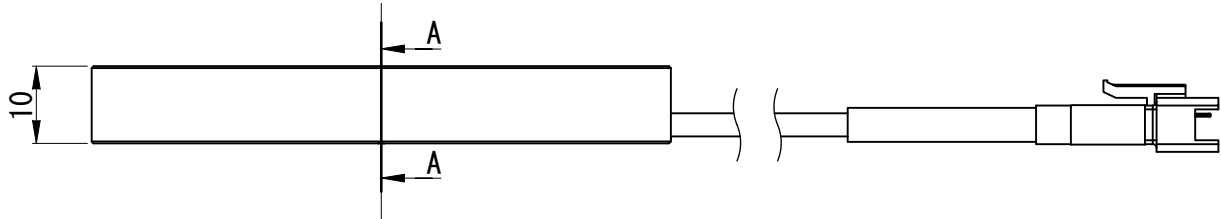


Section A:A

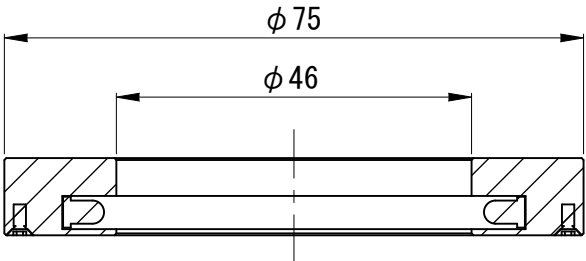

4-M3 DP4
P. C. D. $\phi 56$

Connector : JST SMR-03V-B

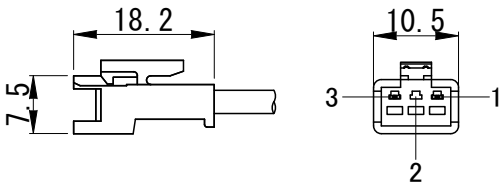

Minimum Bending Radius : 20mm
Length : 500±20mm
Note : This cable can not slide

Pin	Polarity	Wire Color
1	+	BK/WH
2	NC	
3	-	BK

<u>MATERIAL</u>				<u>CHAMFER</u>		—		<u>UNIT</u>	<u>METHOD</u> 図法
<u>TREATMENT</u>		—		<u>FINISHING</u>		—		mm	
<u>TREATMENT CONTACT</u>		—		<u>DECENTRATION</u>		—			
<u>APPROVED</u>	<u>CHECKED</u>	<u>DESIGNED</u>	<u>DRAWN</u>	<u>TOLERANCE</u>	—	<u>REMARK</u>	DRAWING		
Lee	Lee	Benson	Benson	<u>ANGLE</u>	—	NAME			
				SCALE	1 / 1				
				DATE	2020/5/25				
						VHR-7546			
						L1114A-A00100			

△ ×			
NO. ×	REVISION	DATE	NAME

DRAWING

VHR-7546

L1114A-A00100