


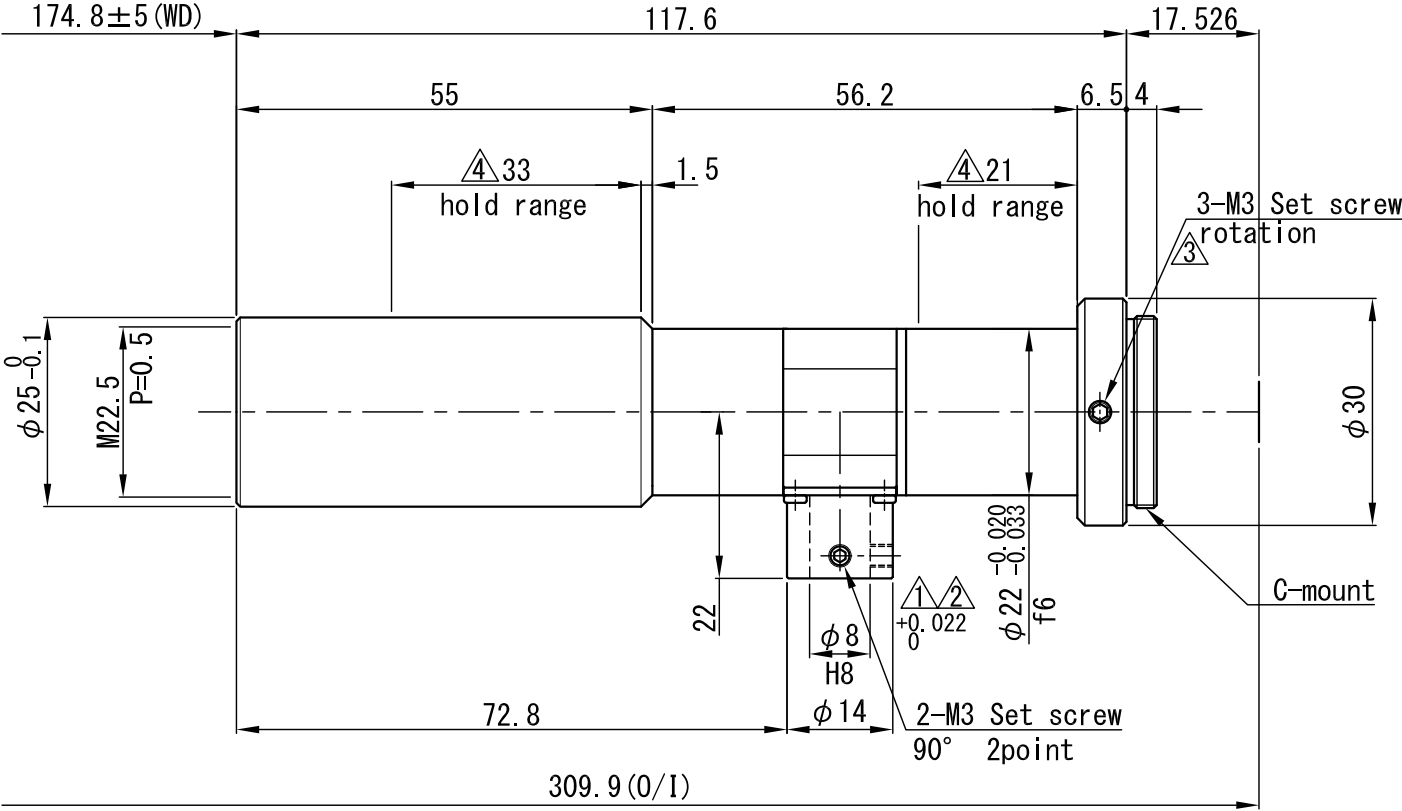

△ ×				APPROVED	CHECKED	MATERIAL 材料	—	CHAMFER 一般面取	—	QUANTITY 個数
4 × 2	ホ-ル 範圍追加	20.10.05	R.H.	T.A.	T.A.	TREATMENT 処理	—	FINISHING 仕上	—	
3 × 1	rotation表記追加	19.03.03	T.F.			TREATMENT CONTACT 処理接点	—	DECENTRATION 偏芯	—	
2 × 1	φ 8.1 (± 0.05) → φ 8 (+ 0.022/0)	19.05.08	S.U.	DESIGNED	DRAWN	OVER 250 UP TO 1000 ± 0.3 ± 0.5 ± 1.0 ± 0.2	UNIT (mm)	ANGLE 角度	METHOD 図法	REMARK 適用 (機種名)
1 × 1	φ 8 (+ 0.022/0) → φ 8.1 (± 0.05)	18.08.09	S.S.	T.A.	M.Y.	OVER 63 UP TO 250 ± 0.2 ± 0.3 ± 0.6 ± 0.15	—	—	VS - T C 0 8 - 1 7 0 C 0	
NO. × 箇所	REVISION 訂正事項	DATE	NAME			OVER 16 UP TO 63 ± 0.1 ± 0.2 ± 0.4 ± 0.1	SCALE	1 / 1	NAME	DRAWING / 外觀図
						OVER 0 UP TO 16 ± 0.05 ± 0.1 ± 0.2 ± 0.1	DATE	11.05.10	DRAW NO.	01DTC0450A5
						TOLERANCES A B C S				